

R5G

Straight Gravity Roller Conveyor



Side Guide for Roller Conveyor
See page 51

Application

Gravity-assisted conveying of products in various sizes

Technical data

Frame material: satin anodized aluminum
Roller material: galvanized steel
Temperature range: from -20°C to +80°C
Max. weight of conveyed material: 100 kg

Inside width min.: 90 mm
Inside width max.: 1210 mm


Roller options:

- Standard rollers with metal bearing (ESD)
- Low-friction rollers with plastic bearings (no ESD)




Optionally with end stop


Option without side guides

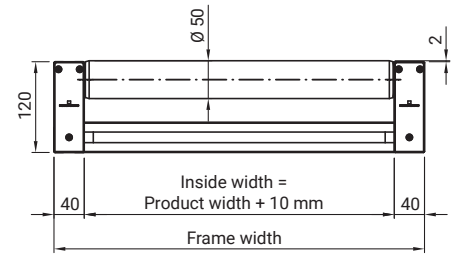

Option with side guides

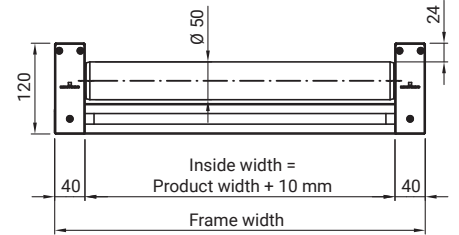

Dimensions

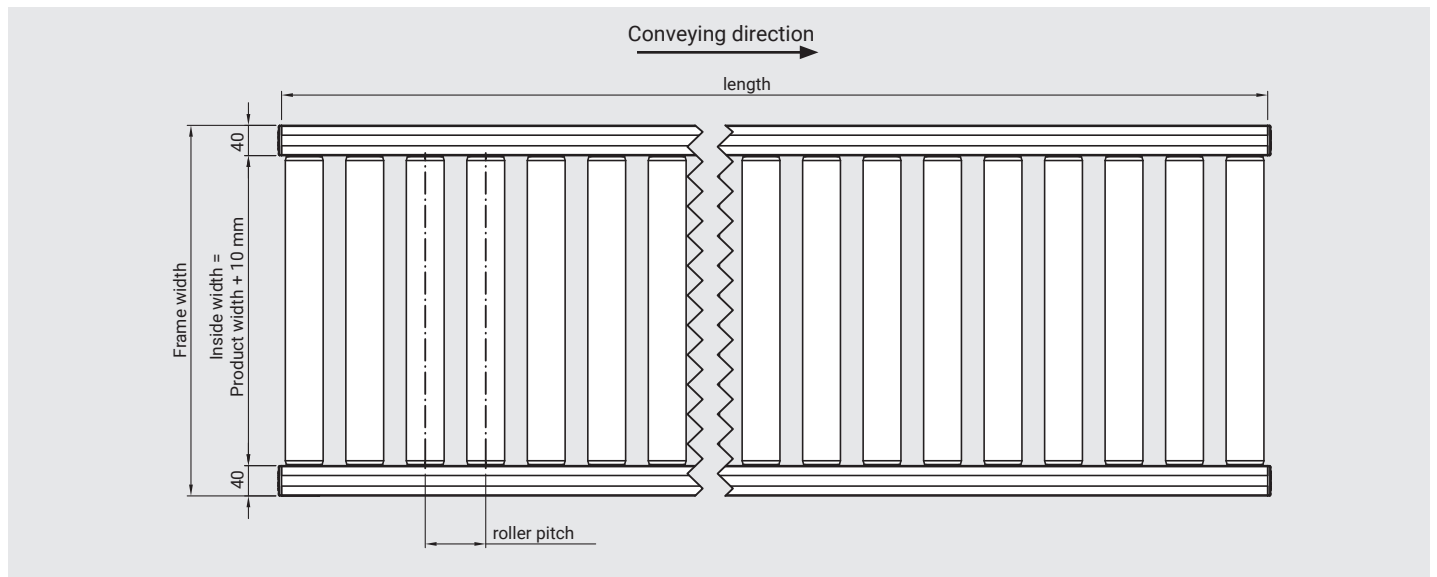

Please use our request form at www.robotunits.com.

Drawings: dimensions in mm