



# Type 900X

## Miniature I/P, E/P Transducer for Electronic Air Pressure Control

Now with low output ranges

Closed loop and self-correcting to maintain precise control


The Type-900X I/P, E/P transducer converts an electrical signal (current or voltage) to a proportional pneumatic output. Utilizing closed-loop pressure feedback circuitry, it provides precise, stable pressure outputs to final control elements. Immunity to vibration effects or mounting position, high tolerance to impure air, and low air consumption make this unit ideal for demanding applications. The compact housing, accessible ports and easy adjustments make it perfect for constrained spaces. An integral volume booster provides high flow capacity, increasing control speed in critical applications.

### Features

- Electronic Closed-loop Feedback** Minimizes effects of vibration, mounting position, temperature and supply pressure
- Compact Size** Great for high density mounting
- Easy Wiring** Conduit, terminal block, M12 or DIN 43650 connections
- Input/Output Ports on Front and Back** Provides flexible pneumatic connections
- 1/4" NPT or 1/4" BSP Porting**
- Other Features** Field selectable outputs (optional), field reversible, RFI/EMI protection, external orifice, supply pressures up to 130 psig
- Intrinsic Safety Approvals**  
Standard feature for 4-20mA units:
  - Factory Mutual (FM),
  - Canadian Standards Assoc. (CSA)

Optional feature for 4-20mA units:

ATEX

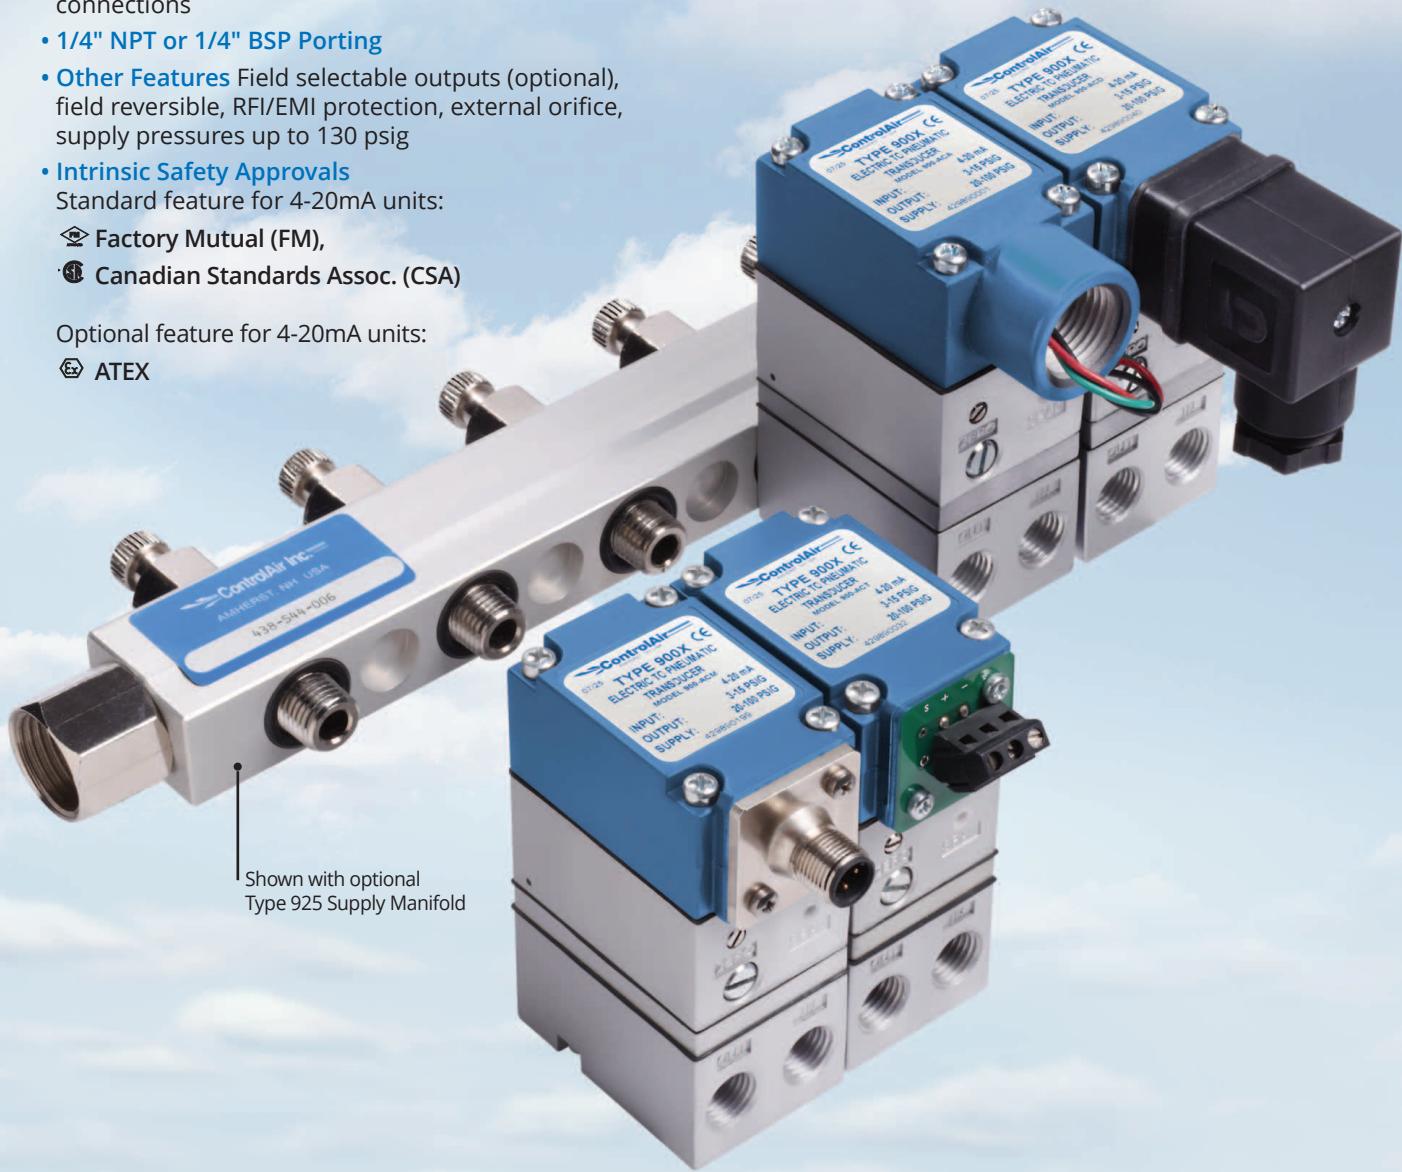

Shown with optional  
Type 925 Supply Manifold

# Type 900X Durable, precise control from a variable signal

## Functional Specifications

		Standard Range				Low Output Range				High Output Range				
<b>Inputs<sup>†</sup></b>		4-20 mA, 0-10VDC, 1-9 VDC, 0-5 VDC, 1-5 VDC												
<b>Outputs</b>	<b>psig (bar)</b>	1-17 (0.07-1.20)	3-15 (0.20-1.00)	3-27 (0.20-1.80)	6-30 (0.40-2.00)	0-5 (0.00-0.35)	0-15 (0.00-1.00)	0-30 (0.00-2.00)	2-60 (0.14-4.00)	2-100 (0.14-6.90)	0-60* (0.00-4.00)			
<b>Supply Pressure</b>	<b>psig (bar)</b>	22-60 (1.50-4.0)	20-100 (1.40-6.90)	32-100 (2.20-6.90)	35-100 (2.40-6.90)	10-30 (0.70-2.1)	25-65 (1.72-4.50)	40-70 (2.75-4.82)	65-130 (4.50-9.00)	105-130 (7.20-9.00)	70-80 (4.82-5.50)			
<b>Air Consumption*</b>		1.5 scfh (0.75 NL/min) at mid range typical								4.5 scfh (2.25 NL/min) at mid range typical				
<b>Flow Capacity</b>		4.5 scfm (127 NL/min) at 25 psig (1.7 bar) supply 12.0 scfm (340 NL/min) at 100 psig (7.0 bar) supply								20.0 scfm (566 NL/min) at 130 psig (9.0 bar) supply				
<b>Temperature Limits</b>		Operating -40° to +158° F (-40° to +70° C) Storage -40° to +200° F (-40° to +93° C)												
<b>Loop Load, I/P Transducer</b>		9.5 VDC @ 20 mA												
<b>Supply Voltage, E/P Transducer</b>		7-30 VDC, less than 3 mA												
<b>Signal Impedance E/P Transducer</b>		10 Kilohms												


<sup>†</sup> Extended periods of electrical input without supply air pressure may damage unit.

\* Zero-based units have slightly higher air consumption.

## Principles of Operation

The heart of this unique technology is a bimorph piezo actuator that is encapsulated in a protective skin. This provides a constant defense against humidity and contaminants often found in process operating environments. The Type-900X utilizes a nozzle to control a pilot pressure to an integral volume booster. The resultant output pressure is measured by a pressure sensor which in turn provides a feedback signal to the circuitry.

The feedback circuit compares this signal to the input signal and self corrects as necessary, thus minimizing the effects of variation in vibration, position, temperature, and supply pressure. The current/voltage signal flows to the piezo actuator causing the actuator to move toward a nozzle. This restricts the flow of air through the nozzle and creates back pressure in the nozzle which acts as a pilot pressure to an integral booster relay.

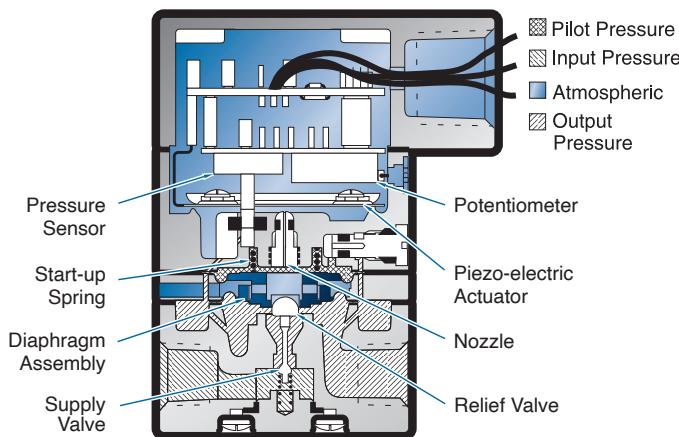

## Performance Specifications

<b>Accuracy, Hysteresis, and Repeatability</b>	±0.10% of span guaranteed
<b>Deadband</b>	.02% of span
<b>Position Effect</b>	No measurable effect
<b>Vibration Effect</b>	Less than ±1.0% of span under the following conditions: 5-15Hz @ 0.8 inches constant displacement; 15-500Hz @ 10g's
<b>Supply Pressure Effect</b>	No measurable effect
<b>Temperature Effect</b>	±0.045%/°F (0.07%/°C) of span
<b>Reverse Polarity Effect</b>	No damage from reversal of normal (4-20 mA) or from misapplication of up to 60 mA
<b>RFI/EMI Effect</b>	Less than .5% of span change in output pressure per En 61000-4-3:1998, Amendment 1, Performance Criterion A


## Physical Specifications

<b>Port Sizes</b>	Pneumatic 1/4" NPT
	Electric 1/2" NPT
<b>Media</b>	Clean, dry, oil-free, air-filtered to 40 micron
<b>Mounting</b>	Wall, panel, 1.5" or 2" pipe (optional) or DIN rail (optional)
<b>Enclosure</b>	NEMA 4X {IP-65} (conduit connection "A" only)
<b>Materials</b>	Housing Chromate-treated aluminum with epoxy paint. NEMA 4X (IP65)
	Elastomers Buna-N
	Trim Stainless steel; brass; zinc-plated steel
<b>Weight</b>	13.0 oz (0.4 kg)

## Electrical Connections

### Standard Configurations


#### 1/2 inch Conduit Connection (A)

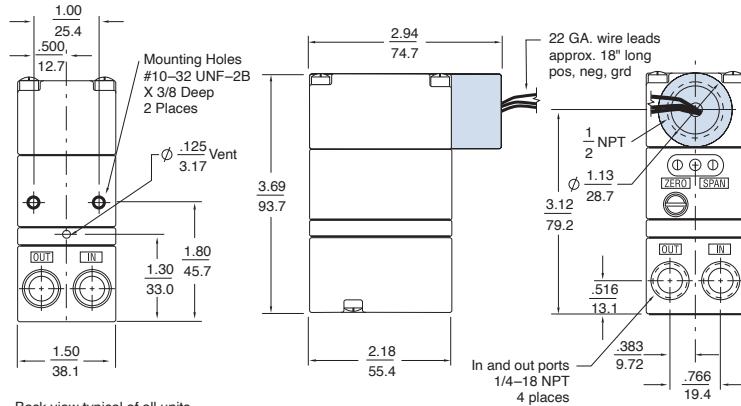


Back view typical of all units

### Options


#### Terminal Block (T)

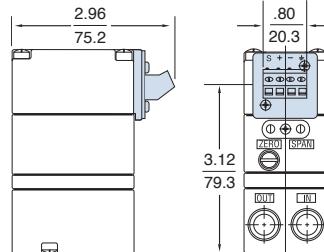

#### M12 Connector (M)

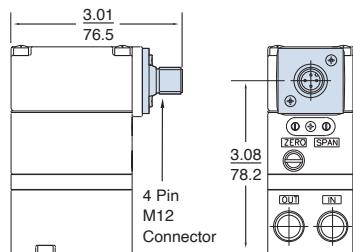


#### DIN 43650 Connector (D)

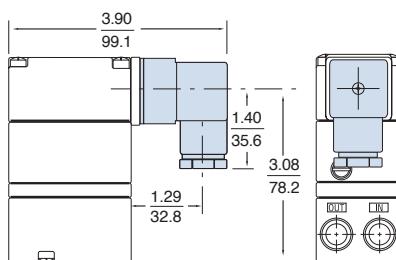


## Mounting Options

### Pipe Mounting-1.5" or 2" Pipe

Order kit # 448-542-005

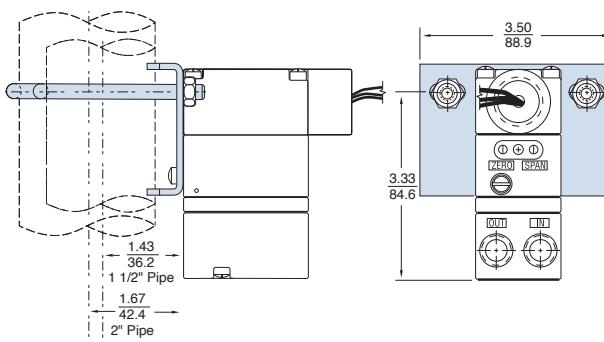


### Panel Mounting

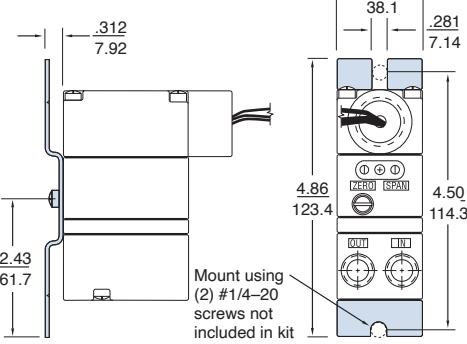

### DIN Rail Mounting

Order kit # 445-766-024

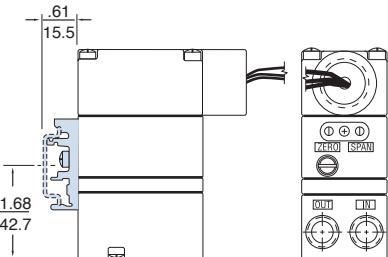

## Type 925 Multifunction Supply Manifold


Common supply  
port with individual  
shut off valves

The Type 925 Multifunction Manifold provides a common air supply line to multiple units of our Type 550X and Type 900X I/P, E/P transducers.




Scan code for  
Spec Sheet

## Dimensional Drawings

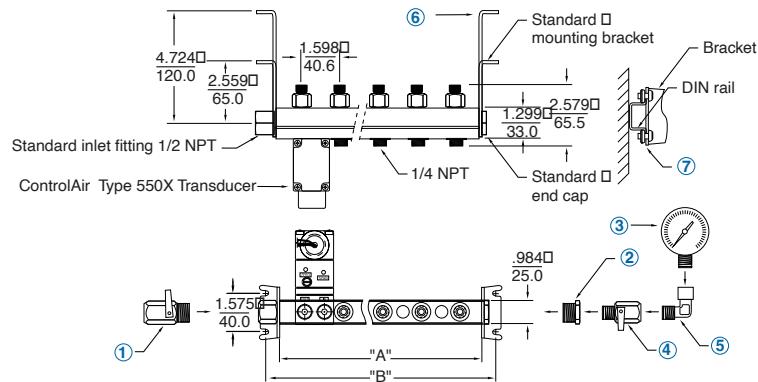

# Type 900X Miniature I/P, E/P Transducer for Electronic Air Pressure Control


## Performance Characteristics

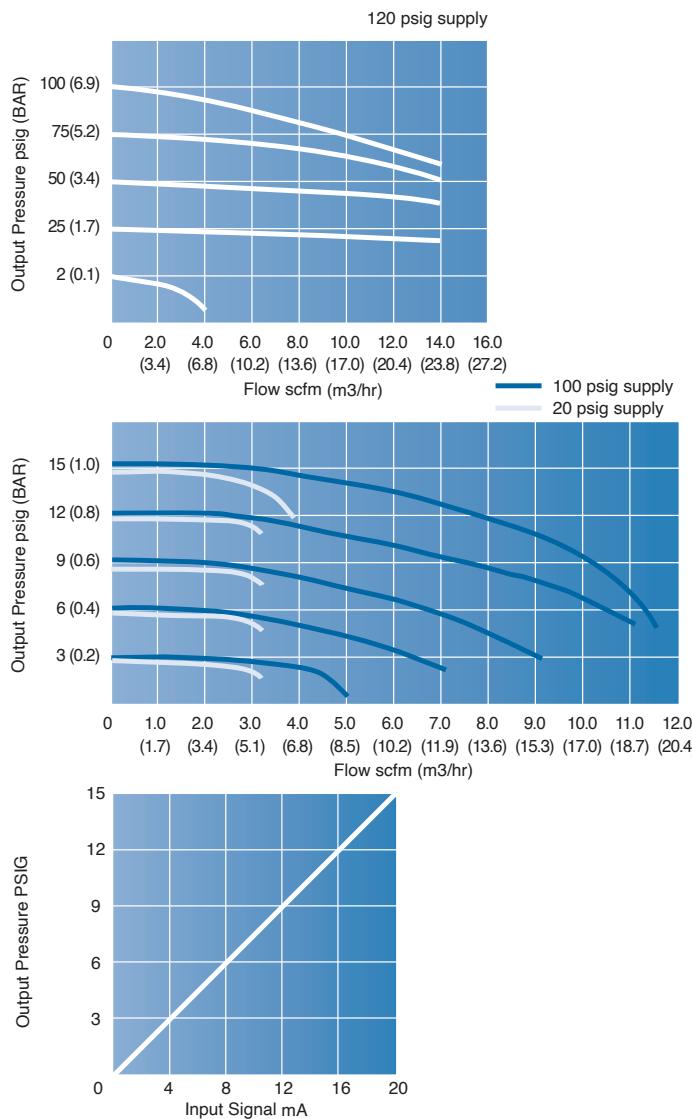

**Warranty** ControlAir, LLC products are warranted to be free from defects in materials and workmanship for a period of eighteen months from the date of sale, provided said products are used according to ControlAir, LLC recommended usages. ControlAir, LLC's liability is limited to the repair, purchase price refund, or replacement in kind, at ControlAir, LLC's sole option, of any products proved defective. ControlAir, LLC reserves the right to discontinue manufacture of any products or change products materials, designs or specifications without notice. Note: ControlAir does not assume responsibility for the selection, use, or maintenance of any product. Responsibility for the proper selection, use, and maintenance of any ControlAir product remains solely with the purchaser and end user. Drawing downloads available at [www.controlair.com](http://www.controlair.com).

## Ordering

Use this coding system to order

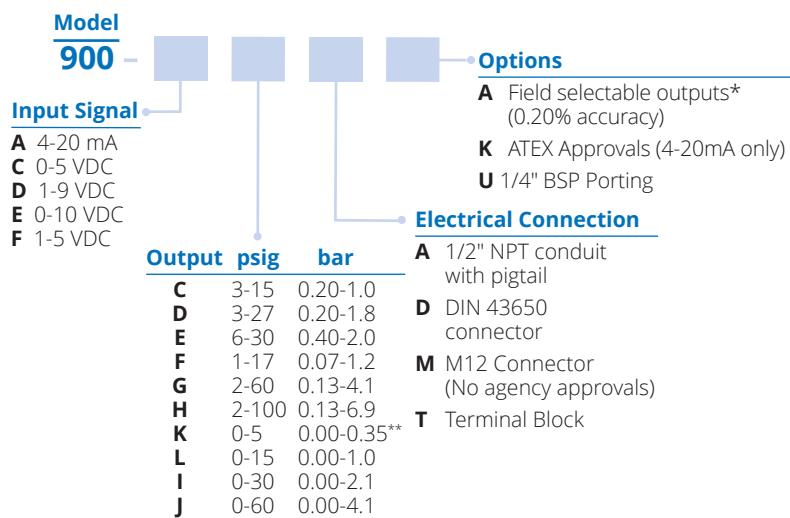

\* Field selectable option is available only for units with the following outputs: 3-15 psig, 3-27 psig, 6-30 psig.

\*\* Output "K" is general purpose only. No approvals.

## Accessories

DIN Rail Mounting Kit	Kit # 445-766-024
1.5" or 2" Pipe Mounting Kit	Kit # 448-542-005

## Hazardous Area Classification

### Factory Mutual (FM) & Canadian Standards (CSA) Approvals

Standard feature for 4-20mA units

### Intrinsically Safe (1/2" NPT Conduit)

Class I, II, III, Division 1,  
Groups C, D, E, F, & G  
Enclosure Nema 4X(IP 65)  
Temp. Code T4 Ta = 70° C  
Rated 4-20 mA, 30 VDC Max.

### Non-Incendive (Conduit, DIN, Terminal)

Class I, Division 2,  
Groups A, B, C & D  
Temp. Code T4 Ta = 70° C

### Suitable for (Conduit only)

Class II & III, Division 2,  
Groups F & G  
Temp. Code T4 Ta = 70° C

### Entity Parameters (DIN and Terminal)

Ui (Vmax) = 30 VDC Ci = .03 uF  
Ii (Imax) = 125 mA Li = 0 mH  
Pi = .7 w Max.

### Intrinsically Safe (DIN & Terminal)

Class I, Division 1, Groups C & D  
Temp. Code T4 Ta = 70° C  
Rated 4-20 mA, 30 VDC Max.

### Entity Parameters (conduit)

Ui (Vmax) = 30 VDC Ci = 0 uF  
Ii (Imax) = 125 mA Li = 0 mH  
Pi = .7 w Max.

### ATEX Approvals (option K)

II 1 G Ex ia IIB T4  
CE 1725 Tamb = -40° C to +70° C  
FM08ATEX0048X

### Entity Parameters

U: (Vmax) = 30 VDC Ci = 1 uF  
I: (Imax) = 125 mA Li = 2.2 mH  
Pi = .7 W Max.



8 Columbia Drive / Amherst, NH 03031 USA / [www.controlair.com](http://www.controlair.com) / [sales@controlair.com](mailto:sales@controlair.com) / 603-886-9400 / FAX 603-889-1844

An ISO 9001:2015 Registered Company

Distributed by Valin Corporation | [www.valin.com](http://www.valin.com) | (800) 774-5630 | [customerservice@valin.com](mailto:customerservice@valin.com)