


NEW! DES-CASE MOBILE UTILITY CART


A 3-IN-1 MOBILE SYSTEM FOR LUBRICANT STORAGE, HANDLING, AND SYSTEM TOP-OFFS.

This system combines filtration, storage, and breathers in one simple solution to keep your lubricants clean and dry.

EASY PUSHING ACROSS PLANT FLOOR

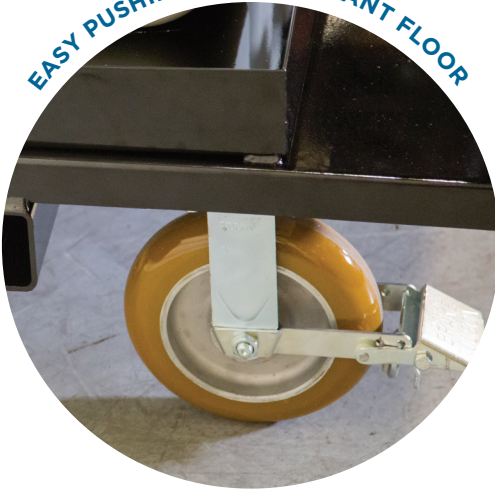

HITCH FOR PULLING LONG DISTANCES

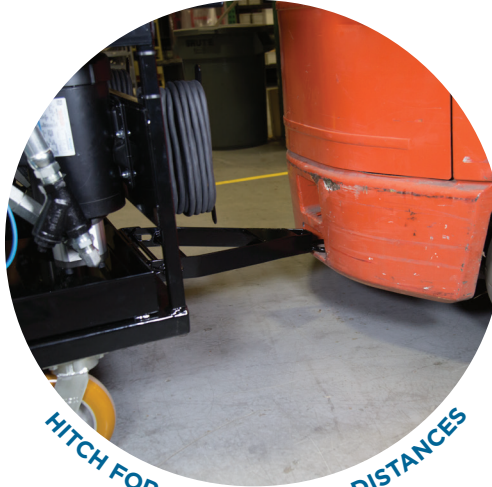

FORKLIFT BEAMS FOR ALTERNATE TRANSPORTATION



OVERVIEW

Mobile Utility Cart Uses:

- Storing lubricants
- Decontaminating systems
- Flushing new or repaired systems
- Dispensing new oil
- Pre-filtering new oil
- Evacuating used oil
- Reservoir top-offs
- Collecting oil samples for analysis

What Is Standard?

- Heavy-duty cart with industrial powder-coated paint
- Removable storage tray for IsoLink™ oil transfer containers*
- Oil catch pans
- Rack for grease guns
- Automatic pump pressure relief valve
- Non-bypass filter heads which prevent particles from passing by when the filters reach maximum saturation
- Dedicated pump, motor and filter per tank
- Desiccant breathers for tanks
- HDPE tanks in 35 or 65-gallon volumes
- 12' hose assemblies with various hose-end connections
- 25' cords (for electric motors only)
- One-year warranty



NEW! DES-CASE MOBILE UTILITY CART

A 3-IN-1 MOBILE SYSTEM FOR LUBRICANT STORAGE, HANDLING, AND SYSTEM TOP-OFFS.

What Is Customizable?

- Flow rates
- Filter bypass
- Sample valves
- Filter micron rating
- Hose-end connection sizes and types
- Tank sizes
- Y-Strainer

Performance

- For filtering mineral-based industrial oils and most synthetic oils with a maximum operating viscosity range of ISO VG 680 (3000 ssu/648 cSt) at 100°F/38°C within ambient temperature ranges of -15-104°F (-26-40°C)

Materials:

- Cart: Carbon steel
- Tank: HDPE
- Paint: Industrial powder coat
- Filter heads: Aluminum
- Fittings: Zinc-plated steel and/or brass
- Pumps: Aluminum/steel
- Hoses: Clear PVC with steel wire
- Gaskets: Buna-N

Filter Indicators:

- Filter indicator pops at 22 psid (1.55 bar) as warning that filter elements need to be replaced

Pump Relief:

- Opens at 65 psi (5.49 bar)

Weight:

- Approximately 605-1405 lbs (will vary depending on the options selected and oil weight)

Cart Dimensions:

- 60" L x 36" W x 51" H



*IsoLink™ sold separately

THE ENTIRE DES-CASE LINE

We offer a full range of fluid handling and filtration products in Portable Filtration, Dedicated Filtration, Water Removal, Lubricant Storage & Filtration, Filter Elements, and Adapter Kits to suit your needs.

Customize your system today at descase.com.