

## Series SWN



AVENTICS™ Series SWN




# Screw-in cylinder, Series SWN

- Spring force [N] 2,1 ... 17,5
- Ø 6-16 mm
- Single-acting, retracted without pressure



Working pressure min./max.	2 ... 8 bar
Ambient temperature min./max.	-20 ... 80 °C
Medium temperature min./max.	-20 ... 80 °C
Medium	Compressed air
Max. particle size	5 µm
Oil content of compressed air	0 ... 1 mg/m <sup>3</sup>
Pressure for determining piston forces	6 bar
Spring force min. - max.	For the min.-max. spring force [N] in relation to piston diameter and stroke S, please refer to the table of dimensions.
Weight	See table below

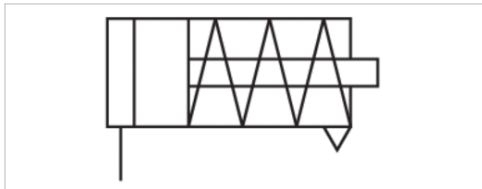

## Technical data

Piston Ø	6 mm	10 mm	16 mm
Stroke 5	0822406900	0822406910	0822406920
10	0822406901	0822406911	0822406921
15	0822406902	0822406912	0822406922

## Technical data

Piston Ø	6 mm	10 mm	16 mm
Extracting piston force	15 N	38 N	100 N

## Technical information

The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .

The oil content of compressed air must remain constant during the life cycle.

Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in the MediaCentre).


## Technical information

Material	
Cylinder tube	Brass, nickel-plated
Piston rod	Stainless steel

Material	
Front cover	Brass
Nut for piston rod	Steel, galvanized

## Dimensions

### Dimensions

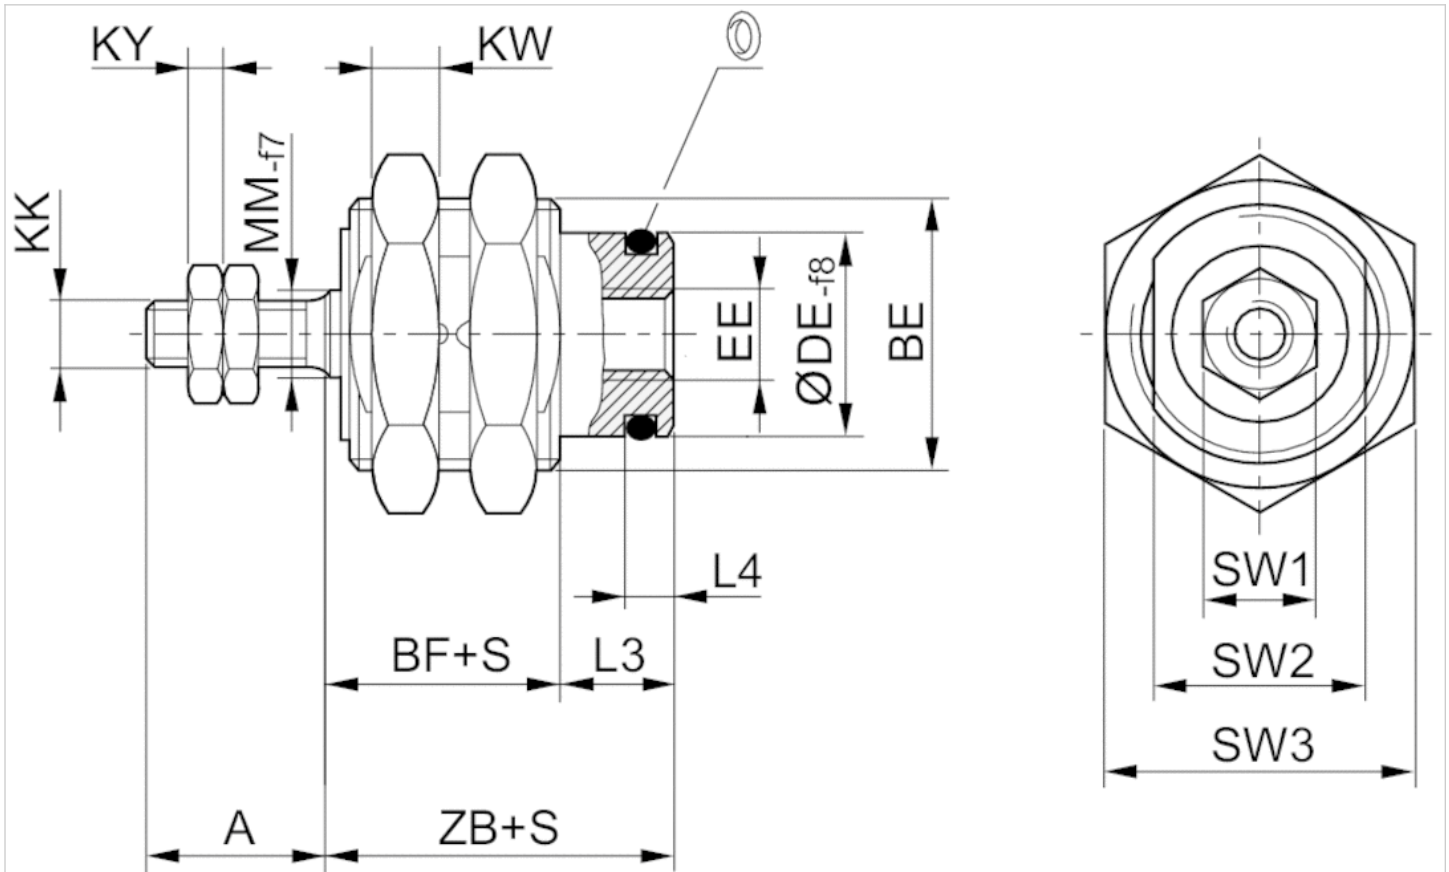

S = stroke

## Dimensions

Piston Ø	S	A	BE	BF	DE 1)	Spring force [N] min.	Spring force [N] max.	EE	KK	KW
6 mm	5	7	M10x1	8.5	7.6	2.4	4.4	M5	M3	3
6 mm	10	7	M10x1	10.5	7.6	2.1	5.8	M5	M3	3
6 mm	15	7	M10x1	12.5	7.6	2.3	5	M5	M3	3
10 mm	5	10	M16x1,5	9.5	12	5.8	9.2	M5	M4	6
10 mm	10	10	M16x1,5	11	12	4.1	7.7	M5	M4	6
10 mm	15	10	M16x1,5	13	12	3.9	8.3	M5	M4	6
16 mm	5	12	M22x1,5	12.8	18.5	14	17	M5	M5	5
16 mm	10	12	M22x1,5	13.8	18.5	11.5	16.5	M5	M5	5
16 mm	15	12	M22x1,5	15.3	18.5	8.5	17.5	M5	M5	5

Piston Ø	KY	L3	L4	MM	SW1	SW2	SW3	ZB
6 mm	2.3	6	2.5	3	5.5	9	14	14.5
6 mm	2.3	6	2.5	3	5.5	9	14	16.5

Piston Ø	KY	L3	L4	MM	SW1	SW2	SW3	ZB
6 mm	2.3	6	2.5	3	5.5	9	14	18.5
10 mm	3	7	3	5	7	14	22	16.5
10 mm	3	7	3	5	7	14	22	18
10 mm	3	7	3	5	7	14	22	20
16 mm	3.8	6.7	3.2	5	8	20	27	19.5
16 mm	3.8	6.7	3.2	5	8	20	27	20.5
16 mm	3.8	6.7	3.2	5	8	20	27	22

1) Recommended receiving bore DE

### Weight [kg]

Piston Ø	S	Weight kg
6 mm	5	0.01 kg
6 mm	10	0.01 kg
6 mm	15	0.011 kg
10 mm	5	0.018 kg
10 mm	10	0.02 kg
10 mm	15	0.022 kg
16 mm	5	0.04 kg
16 mm	10	0.043 kg
16 mm	15	0.046 kg

S = stroke

# Efficient pneumatic solutions, our program: cylinders and drives, valves and valve systems, air supply management



Visit us: [Emerson.com/Aventics](https://www.emerson.com/Aventics)

Your local contact: [Emerson.com/contactus](https://www.emerson.com/contactus)



Emerson.com



[Facebook.com/EmersonAutomationSolutions](https://www.facebook.com/EmersonAutomationSolutions)



[LinkedIn.com/company/Emerson-Automation-Solutions](https://www.linkedin.com/company/Emerson-Automation-Solutions)



[Twitter.com/EMR\\_Automation](https://twitter.com/EMR_Automation)

An example configuration is depicted on the title page. The delivered product may thus vary from that in the illustration. Subject to change. This Document, as well as the data, specifications and other information set forth in it, are the exclusive property of AVENTICS GmbH. It may not be reproduced or given to third parties without its consent. Only use the AVENTICS products shown in industrial applications. Read the product documentation completely and carefully before using the product. Observe the applicable regulations and laws of the respective country. When integrating the product into applications, note the system manufacturer's specifications for safe use of the product. The data specified only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that the products are subject to a natural process of wear and aging.

The Emerson logo is a trademark and service mark of Emerson Electric Co. Brand logotype are registered trademarks of one of the Emerson family of companies. All other marks are the property of their respective owners. © 2017 Emerson Electric Co. All rights reserved.  
2019-03



**CONSIDER IT SOLVED™**