

Cold Stabilization of Ale

climate control
electromechanical
filtration
fluid & gas handling
hydraulics
pneumatics
process control

sealing & shielding



Protecting the unique characteristics of your beer

The stabilization of ale is of critical importance for the shelf-life of bottled beers. As producers target new and faraway emerging markets it is critical that the beer reaches customers with its intended characteristics.

It has been shown that beer which has been filtered to achieve cold stabilization retains its unique and desirable characteristics more efficiently than beer stabilized through flash pasteurization. Cold stabilization also demonstrated a beneficial effect on taste characteristics throughout the duration of the beer's shelf-life.

Protecting the shelf-life of your beer

When the decision is taken to bottle real ale, the microbiological stability of the beer leaving the brewery needs to be guaranteed to provide adequate shelf-life. As new faraway markets emerge and off trade consumption increases, the shelf-life of bottled beer becomes increasingly more important.

Brewers of ale, carefully select and balance the ingredients to generate the unique and distinctive characteristics of their brand. These unique characteristics which include colour, brightness and taste such as bitterness and sweetness should remain unaffected by any microbiological stabilization treatment prior to bottling. Cold stabilization refers to the final

microbial filtration of beer using a microporous membrane to remove yeast and typical spoilage organisms to provide extended shelf-life. An alternative method of stabilizing beer, flash pasteurization does not remove the yeast or micro-organisms as with microfiltration but deactivates them by heat. Flash pasteurization also demands higher relative water and energy consumption, therefore making cold stabilization a more appealing process to the micro-brewer and leading global brewers alike

Flash pasteurization was the primary method of stabilizing beer, however, due to the heating and cooling used, the flavours can be altered thus changing the unique characteristics of the beer which have been so carefully selected.

Parker domnick hunter's range of microfiltration products can guarantee the microbiological stabilization of beer, whilst also protecting its unique characteristics.


Cold stabilization as an alternative to flash pasteurization, a brewer's perspective

The final stabilization of beer by microfiltration has commonly been accepted as a more gentle method of stabilization, generating a 'cleaner, fresher, more natural flavour' when compared to flash pasteurization.

A number of independent tests have investigated the effect on taste of both flash pasteurization and cold stabilization by Parker domnick hunter's BEVPOR microfiltration range.

A trial conducted by a leading UK brewery indicated that beer packaged after cold stabilization produced a beer which protected the desirable, crisp and bitter taste profiles when compared to pasteurization in a triangular taste test. (Figure 1.)

The test, carried out with an experienced taste panel, tested the same batch of beer after cold stabilization and flash pasteurization to identify if the method of stabilization impacted upon the finished product characteristics of the beer. In this case, the data generated helped the brewery to select cold stabilization as their preferred method of microbial stabilization.

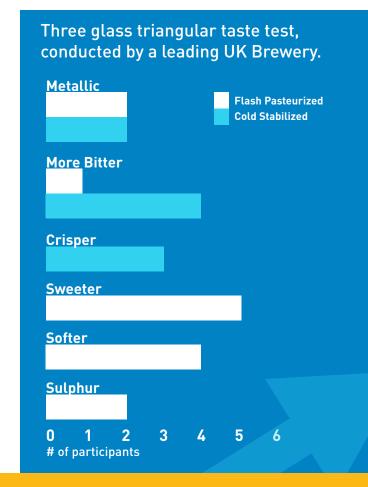

The results generated through the triangular taste test identified the difference in the flavour profiles between pasteurization and cold stabilization, however, the number of tasters that identified the two differing methods of stabilization correctly, means the results can not be deemed significant.

Does the method of stabilization affect shelf-life?

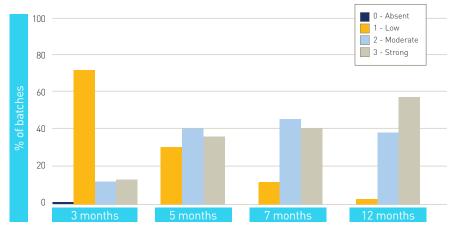


Figure 2 - Pasteurized shelf-life tasting stale / oxidized



Figure 3 - Microfiltered shelf-life tasting stale / oxidized

The studies performed not only established the immediate characteristic changes of the beer that had been pasteurized, they also identified that the method of stabilization had an effect on the beer's characteristics for the duration of the product's shelf-life. (figure 2 & 3).

The work identified that cold stabilization through BEVPOR filtration increased the time taken for the beer to display a stale / oxidized characteristic. Not only did the oxidized characteristics take longer to develop in the micro filtered beer, but it was far less pronounced over the 12 month trial.

A second brewery in the South of England conducted a trial looking at flash pasteurization and cold stabilization to determine which method would be used in the bottling of a leading premium ale. The same batch of beer was sent to two different contract packagers, one packaged the beer after flash pasteurization and the other after cold stabilization.

The brewing team commented that microfiltration appeared to be a gentle process which protected the late hoppy characteristic of the ale. As a result of this process the brewery installed an integral cold stabilization unit from Moravek engineering utilizing Parker domnick hunter BEVPOR microfiltration cartridges and fabricated housings.



Does cold stabilization alter the characteristics of beer?

Cold stabilization will affect the finished product characteristics of the beer, however, with the correct choice of filter materials this can be minimized to protect the unique characteristics of your beer.

The BEVPOR microfiltration range utilizes a Polyethersulphone (PES) membrane which has been carefully selected due to its excellent performance characteristics in beer stabilizing applications. One of the key performance requirements of the PES membrane was making sure the unique characteristics of the beer were protected whilst guaranteeing the removal of yeast and typical spoilage organisms.

Microfiltration elements are designed to remove spoilage organisms through size, however, they will also remove other material such as suspended solids, proteins, polysaccharides and colour through adsorption. Depending on the extent of the adsorption, changes to the final characteristics of the beer may be possible.

Studies into the adsorption of head retention protein components during membrane microfiltration were conducted using two commonly used membrane materials, Polyethersulphone (PES) and Polyamide (PA) for both 0.45 micron and 0.65 micron ratings. (1)(2) Results showed that membrane material had an effect on the protein content of the filtrate. PES reduced the protein content to a lesser degree than the PA membrane. Micron rating was also shown to affect the adsorption of proteins with 0.65 micron filters having a lesser effect than 0.45 micron filters.

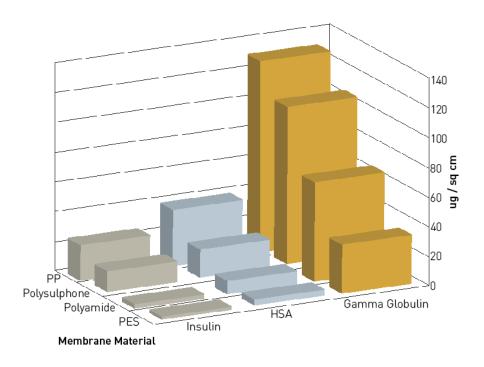


Figure 5 - Protein adsorption of microporous membranes (Source: Akzo Nobel)

A further study was carried out in order to demonstrate the low levels of protein adsorption expected with PES membrane compared to other materials used or beer filtration and serves to demonstrate the functional benefits of using PES on a number of levels (figure 5). Firstly, due to the lower protein adsorption characteristics of PES, the filtration has a negligible effect on the physical and sensory properties of the first run brew, so qualities such as head retention, colour and taste remain unaffected. Secondly, due to the low adsorption affinity, the PES membrane does not foul as readily as PA and is easily cleaned by CIP processes so the system can be regenerated and used again. Both of these qualities have been observed by multiple brewers who have reported the associated functional benefits of using BEVPOR filters.

Parker domnick hunter's team of specialists can help determine the correct filtration system through a series of trials and investigations. Through understanding the application and business critical issues, Parker domnick hunter can help provide a filtration solution which adds value to your business.

Parker Worldwide

Europe, Middle East, Africa

AE - United Arab Emirates, Dubai

Tel: +971 4 8127100 parker.me@parker.com

AT - Austria, Wiener Neustadt Tel: +43 (0)2622 23501-0 parker.austria@parker.com

AT - Eastern Europe, Wiener Neustadt

Tel: +43 (0)2622 23501 900 parker.easteurope@parker.com

AZ - Azerbaijan, Baku Tel: +994 50 2233 458 parker.azerbaijan@parker.com

BE/LU - Belgium, Nivelles Tel: +32 (0)67 280 900 parker.belgium@parker.com

BY - Belarus, Minsk Tel: +375 17 209 9399 parker.belarus@parker.com

CH - Switzerland, Etoy Tel: +41 (0)21 821 87 00 parker.switzerland@parker.com

CZ - Czech Republic, Klecany Tel: +420 284 083 111 parker.czechrepublic@parker.com

DE – Germany, Kaarst Tel: +49 (0)2131 4016 0 parker.germany@parker.com

DK - Denmark, Ballerup Tel: +45 43 56 04 00 parker.denmark@parker.com

ES - Spain, Madrid Tel: +34 902 330 001 parker.spain@parker.com

FI - Finland, Vantaa Tel: +358 (0)20 753 2500 parker.finland@parker.com

FR - France, Contamine s/Arve Tel: +33 (0)4 50 25 80 25 parker.france@parker.com

GR - Greece, Athens Tel: +30 210 933 6450 parker.greece@parker.com

HU - Hungary, Budapest Tel: +36 1 220 4155 parker.hungary@parker.com IE - Ireland, Dublin Tel: +353 (0)1 466 6370 parker.ireland@parker.com

IT - Italy, Corsico (MI) Tel: +39 02 45 19 21 parker.italy@parker.com

KZ - Kazakhstan, Almaty Tel: +7 7272 505 800 parker.easteurope@parker.com

NL - The Netherlands, Oldenzaal Tel: +31 (0)541 585 000 parker.nl@parker.com

NO - Norway, Asker Tel: +47 66 75 34 00 parker.norway@parker.com

PL - Poland, Warsaw Tel: +48 (0)22 573 24 00 parker.poland@parker.com

PT - Portugal, Leca da Palmeira Tel: +351 22 999 7360 parker.portugal@parker.com

RO - Romania, Bucharest Tel: +40 21 252 1382 parker.romania@parker.com

RU - Russia, Moscow Tel: +7 495 645-2156 parker.russia@parker.com

SE - Sweden, Spånga Tel: +46 (0)8 59 79 50 00 parker.sweden@parker.com

SK - Slovakia, Banská Bystrica Tel: +421 484 162 252 parker.slovakia@parker.com

SL - Slovenia. Novo Mesto Tel: +386 7 337 6650 parker.slovenia@parker.com

TR - Turkey, Istanbul Tel: +90 216 4997081 parker.turkey@parker.com

UA - Ukraine, Kiev Tel +380 44 494 2731 parker.ukraine@parker.com

UK - United Kingdom, Warwick Tel: +44 (0)1926 317 878 parker.uk@parker.com

ZA - South Africa, Kempton Park Tel: +27 (0)11 961 0700 parker.southafrica@parker.com

North America

CA - Canada, Milton, Ontario Tel: +1 905 693 3000

US - USA, Cleveland Tel: +1 216 896 3000

Asia Pacific

AU - Australia, Castle Hill Tel: +61 (0)2-9634 7777

CN - China, Shanghai Tel: +86 21 2899 5000

HK - Hong Kong Tel: +852 2428 8008

IN - India, Mumbai Tel: +91 22 6513 7081-85

JP - Japan, Tokyo Tel: +81 (0)3 6408 3901

KR - South Korea, Seoul Tel: +82 2 559 0400

MY - Malaysia, Shah Alam Tel: +60 3 7849 0800

NZ - New Zealand, Mt Wellington

Tel: +64 9 574 1744

SG - Singapore Tel: +65 6887 6300

TH - Thailand, Bangkok Tel: +662 717 8140

TW - Taiwan, Taipei Tel: +886 2 2298 8987

South America

AR - Argentina, Buenos Aires Tel: +54 3327 44 4129

BR - Brazil, Sao Jose dos Campos Tel: +55 12 4009 3500

CL - Chile, Santiago Tel: +56 2 623 1216

MX - Mexico, Apodaca Tel: +52 81 8156 6000

VE - Venezuela, Caracas Tel: +58 212 238 5422

© 2015 Parker Hannifin Corporation. All rights reserved. AN_BR_20_08/15_2A



Parker Hannifin Manufacturing Ltd domnick hunter Process Filtration - Europe Durham Road Birtley, Co. Durham DH3 2SF, England

phone +44 (0)191 4105121

fax +44 (0)191 4105312 email: dhprocess@parker.com www.parker.com/processfiltration

Parker Hannifin Corporation domnick hunter Process Filtration - North America 2340 Eastman Avenue

Oxnard, California, USA 93030 toll free: +1 877 784 2234 phone: +1 805 604 3400 fax: +1 805 604 3401

email: dhpsales.na@parker.com www.parker.com/processfiltration