Building connections that last*



Sharpe[®] Series 5457

Two-Piece Ball Valve Datasheet









Features

- Standard Port
- 2000 CWP (¹/₄"-1")
 1500 CWP (1¹/₄"-2")
 150 WSP with RTFE Seats
 250 WSP with Nova Seats
- Carbon Steel ASTM A216 WCB or 316 Stainless Steel ASTM A351 CF8M
- Threaded Ends
- Blow-Out Proof Stem
- Lockable Lever Handle

Applicable Standards


- Threaded Ends ASME B16.11
- Shell and Seat Pressure Test ASME B16.34


Options


- Lockable Oval Handle
- Spring Return Handle
- Stem Extension, 2–¹/₂", Non–Locking















G



Dimensions (Inches)

| Size | А | В | С | D | Е | F | G | н | ØI | J |
|-------|------|------|------|------|------|------|------|------|------|-------|
| 1/4 | 2.25 | 2.13 | 3.94 | 0.46 | 2.56 | 2.48 | 4.00 | 1.25 | 1.14 | 7.24 |
| 3/8 | 2.25 | 2.13 | 3.94 | 0.50 | 2.56 | 2.48 | 4.33 | 1.25 | 1.14 | 7.24 |
| 1/2 | 2.32 | 2.13 | 3.94 | 0.50 | 2.56 | 2.48 | 4.00 | 1.25 | 1.14 | 7.24 |
| 3/4 | 3.12 | 2.50 | 4.88 | 0.69 | 2.95 | 2.48 | 4.00 | 1.56 | 1.14 | 7.24 |
| 1 | 3.40 | 2.66 | 4.88 | 0.88 | 3.11 | 2.48 | 4.00 | 1.70 | 1.14 | 9.21 |
| 1-1/4 | 4.08 | 3.47 | 5.75 | 1.00 | 3.89 | 3.19 | 5.20 | 2.22 | 1.14 | 12.99 |
| 1-1/2 | 4.35 | 3.63 | 5.75 | 1.26 | 4.02 | 3.19 | 5.20 | 2.41 | 1.14 | 12.99 |
| 2 | 5.39 | 3.82 | 5.75 | 1.50 | 4.20 | 3.19 | 5.20 | 2.59 | 1.14 | 12.99 |



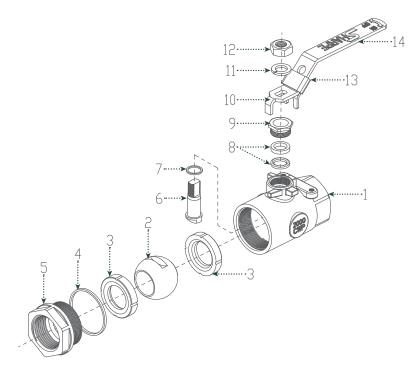

Parts & Materials


| No. | Part Name | Material | Qty. |
|-----|----------------|---|------|
| 1 | Body | Carbon Steel ASTM A216 WCB or 316 Stainless Steel ASTM A351 CF8M | 1 |
| 2 | Ball | 316 Stainless Steel | 1 |
| 3 | Seat* | RTFE / Nova | 2 |
| 4 | Body Seal* | PTFE/Graphite | 1 |
| 5 | End Piece | Carbon Steel ASTM A216 WCB or 316 Stainless Steel ASTM A351 CF8M | 1 |
| 6 | Stem | 316 Stainless Steel | 1 |
| 7 | Thrust Bearing | PTFE | 1 |
| 8 | Stem Packing* | PTFE / Graphite | 2 |
| 9 | Packing Nut | 300 Series Stainless Steel | 1 |
| 10 | Handle | 300 Series Stainless Steel | 1 |
| 11 | Lock Washer | 300 Series Stainless Steel | 1 |
| 12 | Handle Nut | 300 Series Stainless Steel | 1 |
| 13 | Locking Device | 300 Series Stainless Steel | 1 |
| 14 | Handle Sleeve | PVC | 1 |

Note:

*RTFE Seats come with PTFE Seals and PTFE Stem Packing.

Nova Seats come with Graphite Seals and Graphite Stem Packing



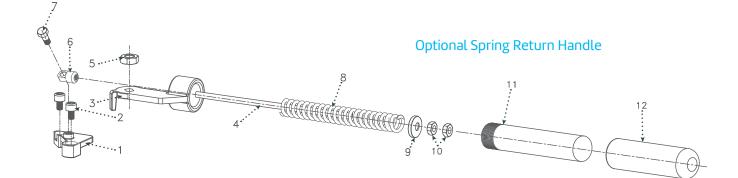


Parts & Materials

| No. | Part Name | Material | Qty. |
|-----|----------------|----------------------------|------|
| 1 | Handle Gland | 304 Stainless Steel | 1 |
| 2 | Socket Screws | 300 Series Stainless Steel | 2 |
| 3 | Head Cap | 304 Stainless Steel | 1 |
| 4 | Threaded Rod | 300 Series Stainless Steel | 1 |
| 5 | Nut | 300 Series Stainless Steel | 1 |
| 6 | Binder Nut | 300 Series Stainless Steel | 1 |
| 7 | Machine Screws | 300 Series Stainless Steel | 1 |
| 8 | Spring Coil | Carbon Steel | 1 |
| 9 | Flat Washer | 300 Series Stainless Steel | 1 |
| 10 | Hex Nut | 300 Series Stainless Steel | 2 |
| 11 | Handle Pipe | 304 Stainless Steel | 1 |
| 12 | Handle Sleeve | PVC | 1 |



Technical Information

| Size | Cv | Weight (lbs.) |
|-------|-----|---------------|
| 1/4 | 6 | 0.7 |
| 3/8 | б | 0.7 |
| 1/2 | 9 | 0.7 |
| 3/4 | 24 | 1.4 |
| 1 | 35 | 1.8 |
| 1-1/4 | 47 | 3.2 |
| 1-1/2 | 81 | 4.3 |
| 2 | 105 | 6.1 |

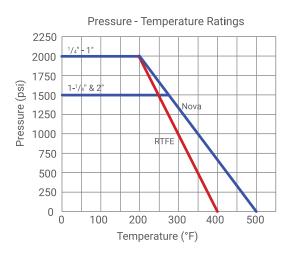





How to order Series 5457

Example

| 1/4 | + | 5457 | + | 6 | + | R | + | | = | ¹ /4" | - | 5457 | - | 6 | - | R |
|------|---|--------|---|------|---|------|---|---------|---|------------------|---|------|---|---|---|---|
| Size | | Series | | Body | | Seat | | Options | | | | | | | | |

| Size | Series | Body | | S | eries | 0 | Options | | | |
|-------|--------|------|-----------------|---|-------|-----|-------------------------|--|--|--|
| 1/4 | 5457 | 4 | Carbon Steel | R | RTFE | ОН | Oval Handle | | | |
| 3/8 | | б | Stainless Steel | Ν | Nova | DMH | Spring Return Handle | | | |
| 1/2 | | | | | | | | | | |
| 3/4 | | | | | | | | | | |
| 1 | | | | | | | | | | |
| 1-1⁄4 | | | | | | | | | | |
| 1-1⁄2 | | | | | | | | | | |
| 2 | | | | | | | | | | |

Note:

Due to continuous development of our product range, we reserve the right to change the dimensions and information for this product as required.

About ASC Engineered Solutions

ASC Engineered Solutions is defined by quality—in its products, services and support. With more than 1,400 employees, the company's portfolio of precision–engineered piping support, valves and connections provides products to more than 4,000 customers across industries, such as mechanical, industrial, fire protection, oil and gas, and commercial and residential construction. Its portfolio of leading brands includes ABZ Valve®, AFCON®, Anvil®, Anvil EPS, Anvil Services, Basic–PSA, Beck®, Catawissa, Cooplet®, FlexHead®, FPPI®, Gruvlok®, J.B. Smith, Merit®, North Alabama Pipe, Quadrant®, SCI®, Sharpe®, SlideLOK®, SPF® and SprinkFLEX®. With headquarters in Commerce, CA, and Exeter, NH, ASC also has ISO 9001:2015 certified production facilities in PA, TN, IL, TX, AL, LA, KS, and RI.



asc-es.com

Building connections that last^{**}

