

Driving Solutions

TopWorx™ Discrete Valve Controllers

Models TVF, TVL, and TVH

The newest addition of valve controllers to the T-Series product line: the TVF, TVL, and TVH. The TV models are a series of switchboxes that offer a compact, rugged, and dependable solution for discrete valve control and valve position monitoring where weight and real estate are at a premium. All TV valve controllers are certified for intrinsically safe (Division 1/Zone 1) and non-incendive applications (Division 2/ Zone 2).

Benefits

- Global certifications allow for international standardization.
- Integrated spool valve with single or dual solenoid options for single acting or double acting pneumatic actuators.
- A wide range of bus/sensor options such as ASi, DeviceNet, Profibus, mechanical, NAMUR, reed, and inductive proximity switches.
- Position switches/sensors are easily set with no tools required, reducing installation time and cost.
- Tropicalized Aluminum or 316 stainless steel housing.
- Direct NAMUR mount capability eliminates costly mounting brackets.
- Low profile, but highly visible indicator and small footprint promote significant space savings.
- Ten-point standard terminal strip (optional twelve-point) and spacious interior layout allows ample room inside the enclosure for wiring.



Electrical Classification

Hazardous Area Approvals

- ATEX & IECEx- Intrinsically Safe, Dustproof and Non-sparking II2GD & II3GD—Zone 1, Zone 2, Zone 21 and Zone 22 approved
- cULus-Intrinsically Safe and Non-incendive Class I & II Division 1; Class I & II Division 2



TVF-Aluminum base with clear resin lid



TVL-Aluminum



TVH- 316 Stainless Steel



EMERSON. CONSIDER IT SOLVED.™

Intrinsically Safe and Non-Incendive



The TopWorx™ TVF, TVL & TVH are ideal for a multitude of applications. Modular in design, they carry ATEX, IECEx, and UL certifications and offer competitive features and flexibility at significant cost savings.






Features:

- Durable, Stainless Steel, or Aluminum enclosures, designed for mounting to NAMUR actuators
- Color-coded TwistSet cams for easy sensor adjustment


Options:

- Mechanical Switches
- Proximity Switches
- Inductive Switches
- Bus Networks


| Enclosure | Bus/Sensor | Area Classification | Visual Display | Shaft | Conduit Entries |
|--|---|--|---|---|---|
| TVF Tropicalized Aluminum base with clear resin lid TVL Tropicalized Aluminum base and lid TVH 316 Stainless Steel Cover bolts: 4 captive slotted stainless steel screws Terminal Strip: Standard 10pt. Molded Nylon Temperature Rating: Determined by internal components-Consult Factory Environment: Designed for NEMA & Type 4, 4X, IP67 | <u>Bus Network</u> (Area class cannot be 0) AS AS-interface DN DeviceNet PB Profibus <u>Mechanical Switches</u> (Area class cannot be 2) M2 (2) Mech SPDT M4 (4) Mech SPDT K2 (2) Mech SPDT w/ gold contacts T2 (2) Mech DPDT <u>Proximity Switches</u> R2 (2) SPDT 200mA max R4 (4) SPDT 200mA max P2 (2) SPDT 3A max Analog Output (Available with M, K, T, E)(Not available w/pilot/spool valve) _x 4-20 mA Transmitter <u>Inductive Sensors</u> E2 (2) p+f NJ2+V3-N inductive NAMUR 12 (2) Ind prox PNP N/O (Area class cannot be "W") Examples: 0X 4-20 mA Transmitter with mechanical switches AS AS-I with "R" type reed switches AM AS-I with "M" type mechanical switches | 0 Intrinsically safe ATEX/IECEx Zone 1 II2GD Ex ia IIC Ex tb IIIC , IP66/68 (Dust groups TVL/TVH only) CII Div 1 Grps A-D; CII Div 1 Grps E-G (TVA ATEX/IECEx only) 2 Non-Incendive ATEX/IECEx Zone 2 II3GD Ex nA nC IIC Ex tc IIIC, IP66/68 CI, Div 2, Grps F&G W No approvals, Type4, 4x IP66/68 G General Purpose Type 4X (Not available on TVA) TVF, TVL & TVH 10pt. Terminal strip w/pilots 12pt. Terminal strip w/o pilots TVA 8pt. Terminal strip w/o pilots | Visual Display: Impact resistant polycarbonate; O-ring sealed; 360° adjustable G Standard 90° Green OPEN, Red CLOSED B 90° Black OPEN, Yellow CLOSED Y 90° Yellow OPEN, Black CLOSED J 3 Way T port, Green/Red K 3 Way L Port, Green/Red F Flat-top with skirt indicator (Indicator not provided with "L" shaft option) TVH & TVL only | N NAMUR 304 stainless steel L 1" Extended Linear Shaft (TVL and TVH only) (Indicator not provided with "L" shaft option) | P (2) 1/2" NPT E (2) 3/4" NPT M (2) M20 1 (2) M25 |
| Ordering Guide Fill in the boxes to create your 'ordering number' | |   For complete information on certification options, go to www.topworx.com and download the applicable product certificate. | | | See Next Column  |
| Enclosure TVH | Bus/Sensor — — | Area Classification — | Visual Display — | Shaft — | Conduit Entries — |

Discrete Valve Control


Dimensions

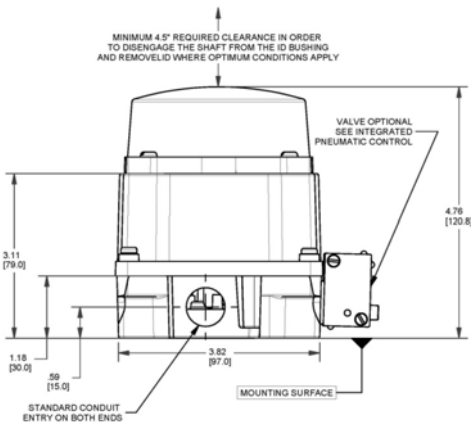

TVH-TVL

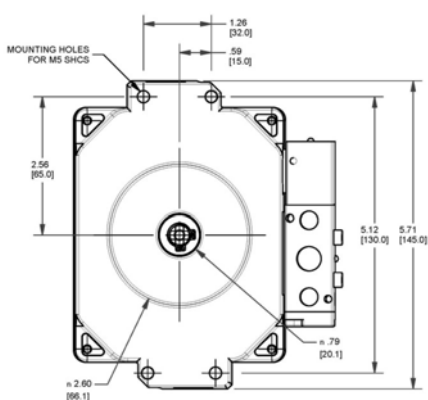

TVL-TVH-TVF

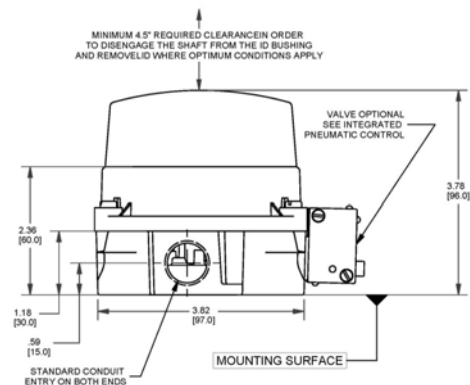

TVF

| O-Rings | Pilot | Spool Valve | Valve Cv | Manual Override | Regional Certs |
|---------------------|--|--|--|--|---|
| M Silicone | Blank No pilot device(s) 1 (1) 24Vdc pilot, 1W (0.7W for I.S.) fail open/close 2 (2) 24Vdc pilots, 1W (0.7W for I.S.) fail last position 4 (1) 220Vac pilot, 3VA, fail open/closed 5 (2) 220Vac pilots, 3VA, fail last position 7 (1) 110Vac pilot, 3VA, fail open/closed 8 (2) 110Vac pilots, 3VA, fail last position | Blank No Spool valve A Aluminum Hard coat anodized 6 316 Stainless steel | Blank No Spool valve 1 1.0 Cv (1/4" NPT Ports) 8 1.0 Cv (1/4" BSP Ports) | Blank No override 1 Single Pushbutton Momentary/Latching | N NEPSI R EAC B InMetro (Area Class "0" only) P Peso (Gas approval only) |
| O-Rings M | Pilot — | Spool Valve — | Valve Cv — | Manual Override — | Regional Certs — |

Superior Valve Control in a Light Weight and Rugged Package.

The TopWorx™ TV models offer an integrated package for discrete valve control. Each model can be configured with an integrated spool valve with single or dual solenoid options for single acting or double acting pneumatic actuators. All internal components (integral switches and solenoids) are pre-wired to 10 pt. terminal strip for ease of field wiring. Designed to provide maximum functionality in a compact form factor, the TopWorx™ T-Series has a number of unique features that save space, time, and money.



Optimum Use of Space

The unique layout supplies ample working space inside the enclosure for wiring and setting of the switches while taking up very little space above the actuator.



TwistSet Cams

Unique TwistSet cam design allows easy access and accurate step-less setting of sensor position with minimum hysteresis.

Color-coded strikers enable quick identification of open/closed switches.



Low Profile Design

The unique direct mounting feature eliminates expensive mounting brackets while reducing the height of the valve controller overall footprint above the actuator.



Direct Mounting

Unique mounting design enables simple attachment to any ISO/ NAMUR actuator without the need for expensive mounting brackets

GLOBAL SALES & SUPPORT OFFICES

Americas

3300 Fern Valley Road
Louisville, Kentucky 40213 USA
+1 502 969 8000
info.topworx@emerson.com

Europe

Horsfield Way
Bredbury Industrial Estate
Stockport SK6 2SU
United Kingdom
+44 0 161 406 5155
info.topworx@emerson.com

Middle East

P.O. Box 17033
Jebel Ali Free Zone
Dubai 17033
United Arab Emirates
+971 4 811 8283
info.topworx@emerson.com

Africa

24 Angus Crescent
Longmeadow Business Estate East
Modderfontein
Gauteng
South Africa
+27 11 451 3700
info.topworx@emerson.com

Asia-Pacific

1 Pandan Crescent
Singapore 128461
+65 6891 7550
info.topworx@emerson.com

ES-03425-1 R2

Visit www.topworx.com for comprehensive information on our company, capabilities, and products – including model numbers, data sheets, specifications, dimensions, and certifications.



© 2015 TopWorx, All rights reserved. TopWorx™, The Emerson logo is a trademark and a service mark of Emerson Electric Co. © 2015 Emerson Electric Company. All other marks are the property of their respective owners. Information herein – including product specifications – is subject to change without notice.