




Color: black



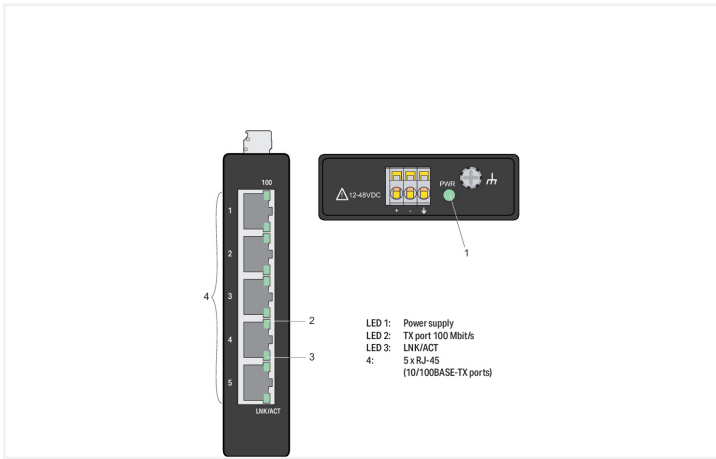

This unmanaged industrial ETHERNET switch (852-111/000-001) has 5 ETHERNET ports for easily setting up small- to medium-sized networks. Its slim design paired with a DIN-rail adapter simplifies installation in the control cabinet and provides high vibration and shock resistance. Additionally, automatic transmission rate detection (auto-negotiation) and automatic identification of the transmit and receive lines (Auto MDI-X) allow simple plug-and-play operation, saving time and money during commissioning.

Features:

- 5 ETHERNET ports 10/100 Mbit/s Autonegotiation
- Front-panel diagnostic LEDs
- Supports Auto-MDI/MDI-X functions
- Full/half-duplex transfer modes for each port
- Store-and-forward switching method
- Integrated address look-up table, supports 2000 absolute MAC addresses
- Overvoltage protection
- IEEE 802.3x flow control in full-duplex mode
- Prioritization of PROFINET data packets (EtherType=0x8892) per IEEE802.1p
- DIN-35 rail mounting

Technical data

Switching mode	Store-and-forward; non-blocking
Number of 100 Mbit/s ports	5
Communication standards	IEEE 802.3 10BASE-T IEEE 802.3u 100BASE-TX IEEE 802.3x Flow Control IEEE 802.1p Prioritization
MAC table (size)	2000 addresses
Supply voltage	12 ... 48 VDC
Power consumption (max.)	2 W
Baud rate	Copper cable: 10/100 Mbit/s
Topology	Star
Indicators	Device: LED (PWR) green: Power supply; per port: LED (100, LNK/ACT) green: Status 100 Mbps, LNK/ACT port 1 ... 5

Connection data

Connection technology: communication/fieldbus	Copper cable: 5 x RJ-45
Connection technology: supply	1 x Built-in male connector: 231-433/001-000; included female connector (MCS Connectors): 231-103/026-000

Physical data

Width	23.4 mm / 0.921 inches
-------	------------------------

Environmental requirements

Ambient temperature (operation)	-40 ... +70 °C
Surrounding air temperature (storage)	-40 ... +85 °C
Protection type	IP30
Relative humidity (without condensation)	95 %
Mounting type	DIN-35 rail
Vibration resistance	per IEC 60068-2-6
Shock resistance	per IEC 60068-2-27
Fire load	0 MJ

Commercial data

PU (SPU)	1 pcs
Country of origin	TW
GTIN	4066966216288
Customs tariff number	85176200000

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
UL Underwriters Laboratories Inc. (ORDINARY LOCATIONS)	UL 61010-2-201	E175199

Downloads

Environmental Product Compliance

Compliance Search	
Environmental Product Compliance 852-111/000-001	↓

Documentation

Manual			
Product Manual Industrial ECO Switch	V 1.0.1 02.09.2022	pdf 3064.57 KB	↓

System Description		
Industrial Switches – General Product Information	pdf 1873.93 KB	↓

Bid Text		
0852-0111/0000-0001	docx 27.43 KB	↓
0852-0111/0000-0001	xml 6.45 KB	↓

CAD/CAE-Data

CAD data	
2D/3D Models 852-111/000-001	↓

1 Compatible Products

1.1 Optional Accessories

1.1.1 Cables and connectors

1.1.1.1 Connector plug



Item No.: 750-979/000-011
Connector ETHERNET; RJ-45; Cat. 6A; angled; Code T568A; AWG 22; Strain relief



Item No.: 750-979/000-021
Connector ETHERNET; RJ-45; Cat. 6A; angled; Code T568A; AWG 24; Strain relief



Item No.: 750-979/000-012
Connector ETHERNET; RJ-45; Cat. 6A; angled; Code T568B; AWG 22; Strain relief



Item No.: 750-979/000-022
Connector ETHERNET; RJ-45; Cat. 6A; angled; Code T568B; AWG 24; Strain relief



Item No.: 750-977/000-011
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 22



Item No.: 750-978/000-011
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 22; Strain relief



Item No.: 750-977/000-021
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 24



Item No.: 750-978/000-021
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 24; Strain relief



Item No.: 750-977/000-012
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568B; AWG 22



Item No.: 750-978/000-012
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568B; AWG 22; Strain relief



Item No.: 750-977/000-022
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568B; AWG 24



Item No.: 750-978/000-022
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568B; AWG 24; Strain relief

1.1.1.1 Connector plug



Item No.: 750-979/000-013

Connector PROFINET; RJ-45; Cat. 6A;
angled; AWG 22; Strain relief



Item No.: 750-977/000-013

Connector PROFINET; RJ-45; Cat. 6A;
straight; AWG 22



Item No.: 750-978/000-013

Connector PROFINET; RJ-45; Cat. 6A;
straight; AWG 22; Strain relief



Item No.: 750-975

ETHERNET RJ-45 connector, IP20;
ETHERNET 10/100 Mbit/s; for field as-
sembly